


PRECISION MOVABLE SHORTS

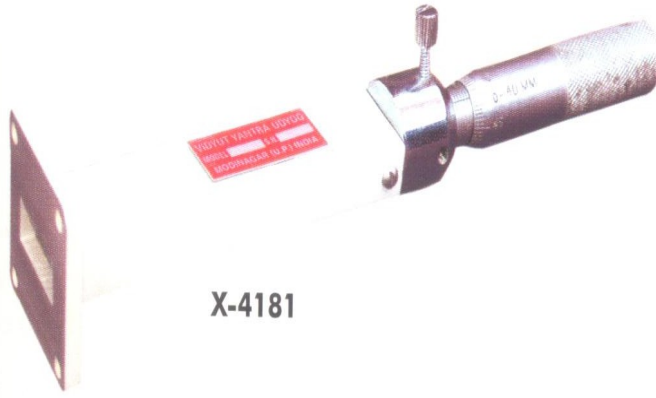

X-4181

- Model 4181 Precision Movable Short are similar to Model 4081 movable shorts except that a non-contacting type plunger is driven by the micrometer of least-count 0.01 mm for precise movement and reading of plunger.

Model No.	Frequency Range (GHz)	Micrometer Size (mm)	Waveguide type (WR-)	Flange type (UG-/U)
C-4181	3.95-5.85	40	187	149A
J-4181	5.85-8.20	40	137	344
X-4181	8.20-12.4	40	90	90
Ku-4181	12.4-18.0	25	62	419
K-4181	18.0-26.5	15	42	595
R-4181	26.5-40.0	15	28	599
V-4181	50.0-75.0	10	15	385
W-4181	75.0-110.0	6	10	387