


MOVABLE SHORTS

- Model 4081 Movable Shorts consists of a section of waveguide, flanged on one end and terminated with a movable shorting plunger on the other end. By means of this non-contacting type plunger a reflection co-efficient of almost unity can be obtained.
- These are available in other frequency bands also.

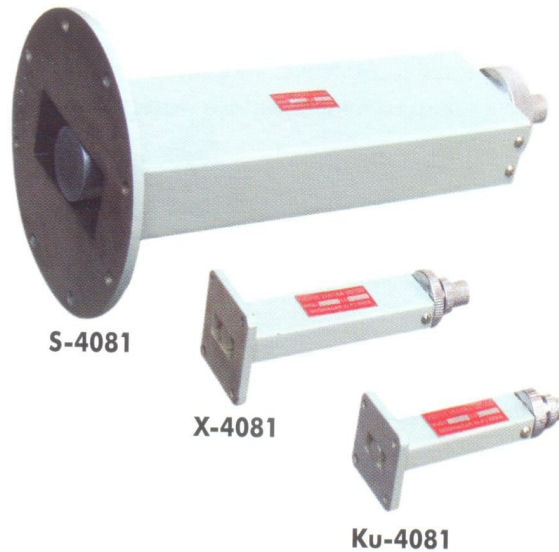

Model No.	Frequency Range (GHz)	Waveguide Type (WR-)	Flanges type UG-/U)
L-4081	1.70-2.60	430	CPR-430
S-4081	2.60-3.95	284	53
C-4081	3.95-5.85	187	149A
J-4081	5.85-8.20	137	344
X-4081	8.20-12.4	90	39
Ku-4081	12.4-18.0	62	419